


# Technical Data sheet - Illuminating Stair Nose

## SN-1G-7512 Series

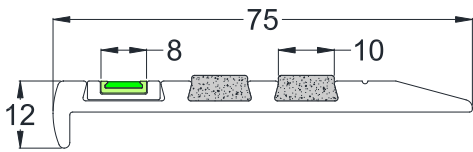

### Illuminating Stair Nose

The Alusite self illuminating profile (Aluminator) can be used as a decorative and safety flooring accessory.


Offering up to 8 hours of self luminescence after a full charge, the Aluminator acts as the final safe exit lighting during backup power failure.

Using proprietary dual extrusion technology, the product has been fully tested for self illuminating capability and meets the American ASTM E 2073-07 standard.

Aluminium Details	
European Standard	EN573-3
British Standard	BS1474
American Standard	ASTM B221
Australian Standard	AS/NZ1866
Alloy	6063
Temper	T5
Composition : Si%	0.2-0.6
Composition : Fe%	0.35
Composition : Cu%	0.1
Composition : Mn%	0.1
Composition : Mg%	0.45-0.90
Composition : Zn%	0.1
Composition : Ti%	0.1
Composition : Cr%	0.1
Composition : Al%	Balance
Tensile Strength <3mm (N/mm <sup>2</sup> )	175
0.2% Proof Stress <3mm (N/mm <sup>2</sup> )	130
Elongation <3mm (%)	8
Flammability	Solid Aluminium is non-combustible material. Does not burn, does not give off smoke when exposed to fire and does not emit sparks on impact.

Photoluminescent Strip		
Wear Resistance	ISO 9352	Passed
Photoluminescent Safety Markings	ASTM E 2073	Passed

Shown the decay curve as following

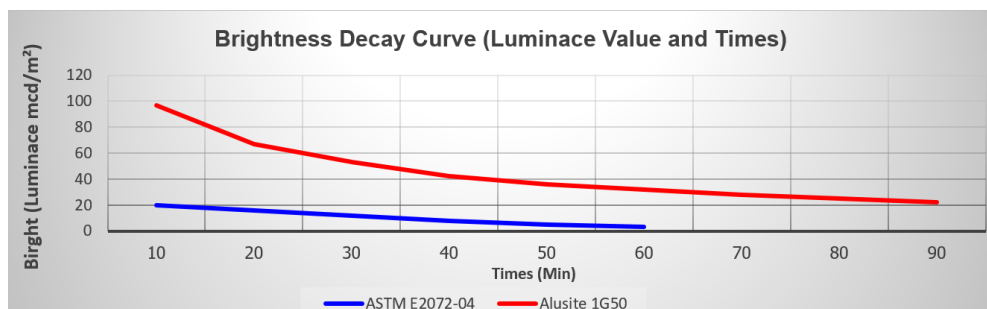

### Head Office & Factory

92, 92/1-4 Moo1, Homsin, Bangpakong, Cha-Choeng-Sao, 24130 Thailand  
 Tel : +66 38 842 749 Email : contact@alusite.com



# Technical Data sheet - Illuminating Stair Nose

## SN-1G-7512 Series

### Silicon Carbide Anti Slip (Passed High Slip Resistance)

Slip resistance classification	AS/NZS 4586	[HIGH*]
Appendix A: WET Pendulum (Four S slider): Mean BPN: 73 V		
Slip resistance classification	AS/NZS 4586	[HIGH*]
Appendix D: OIL-WET Ramp Mean overall acceptance angle: 38.1° R 13		

### Laboratory Test Details

Toxicity and Heavy Metal (RoHS)	ISO 3613	Passed
Toxicity and Heavy Metal (RoHS)	US EPA 3052 & 6010B	Passed
Salt Spray (Corrosion Test)	ASTM B 117-03	240 Hrs
Accelerated Weathering test	ASTM G154	1,000 Hrs

### Maintenance

Alusite Series utilizes 6063 aluminium alloy commonly used for building material. As with any finished building material, anodized aluminum requires reasonable care prior to and during installation and periodic cleaning and maintenance after installation. Although anodized aluminum possesses exceptional resistance to corrosion, discoloration, and wear, its natural beauty can be marred by harsh chemicals, rough conditions or neglect. Such conditions usually affect only the surface finish and do not reduce the service life of the aluminum. However, scratching and wear and may be damaged by tile adhesive, mortar, or grouting material. Therefore, setting materials must be removed with a sponge and warm water immediately.

### Precautions

Remove and clean adhesive or grout residue from visible surfaces immediately. Avoid using aggressive alkaline or acid cleaners on aluminum finishes. Do not use cleaners containing trisodium phosphate, phosphoric acid, hydrochloric acid, hydrofluoric acid, fluorides, or similar compounds on anodized aluminum surfaces. Strong solvents or abrasive cleaners can cause damage to painted surfaces. Always follow the cleaner manufacturer's recommendations as to the proper cleaner and concentration. Test-clean a small area first. Different cleaners should not be mixed.

#### Head Office & Factory

92, 92/1-4 Moo1, Homsin, Bangpakong, Cha-Choeng-Sao, 24130 Thailand  
Tel : +66 38 842 749 Email : contact@alusite.com

